

COCKERILL® 3105



Qualified
In Production
Delivered




Defense America

a John Cockerill company

johncockerillda.com • johncockerill.com/defense

COCKERILL® 3105

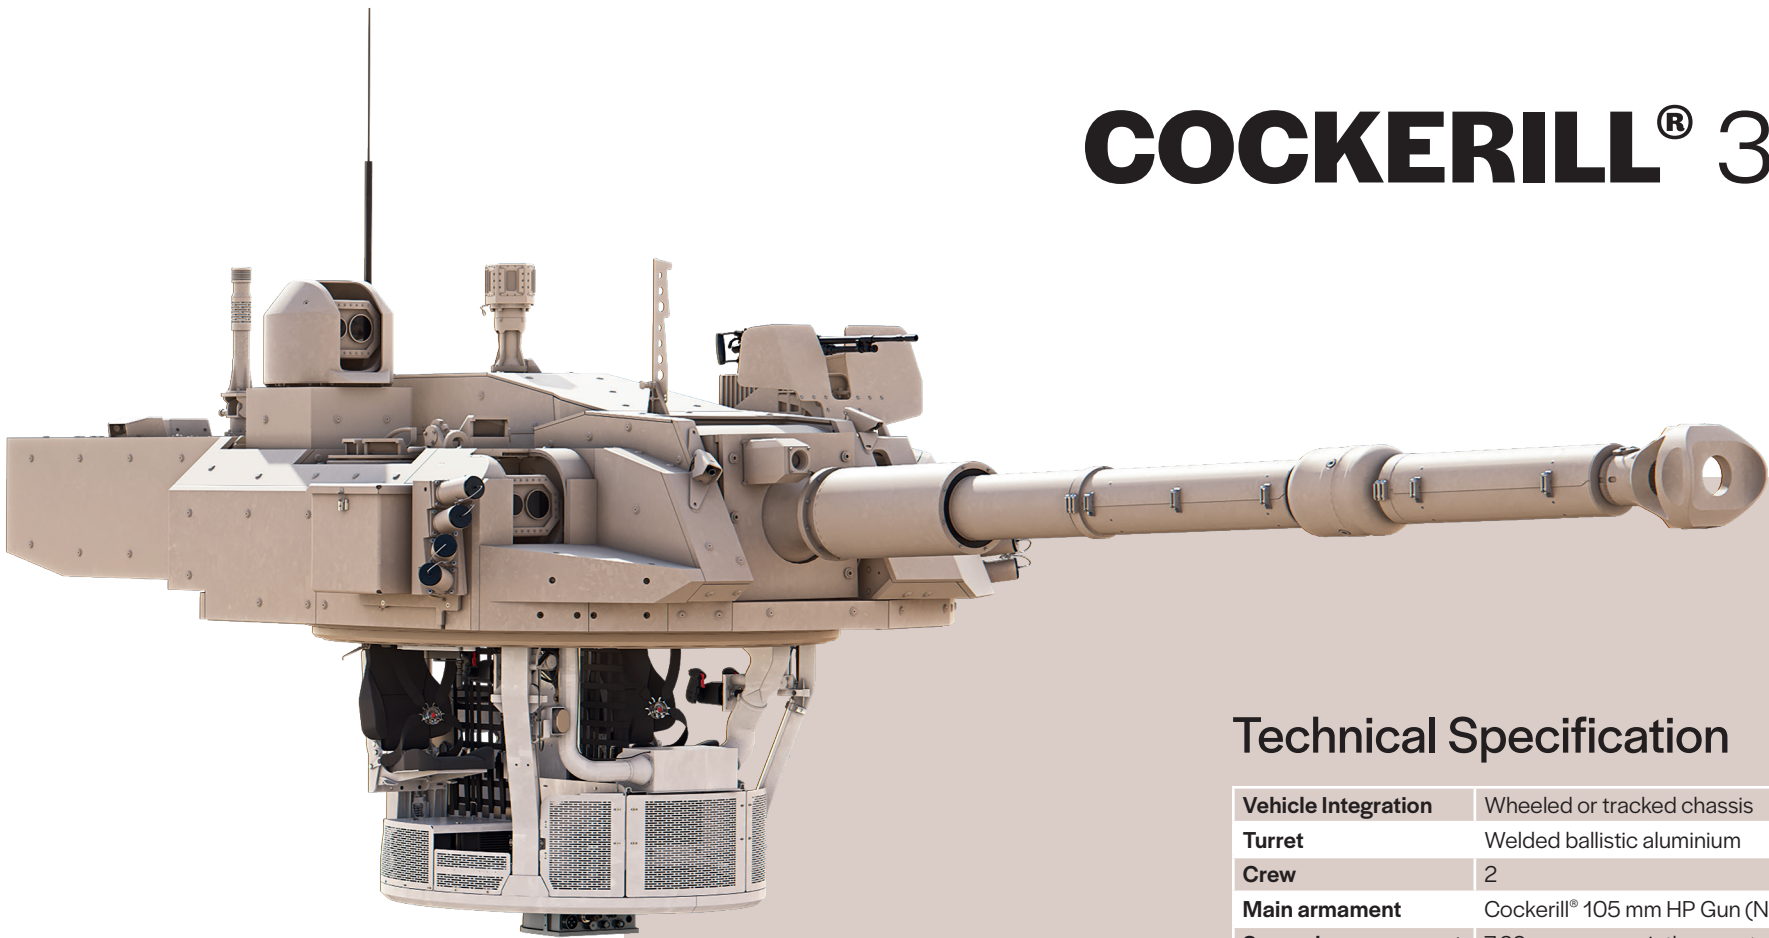

Technical Specification

Vehicle Integration	Wheeled or tracked chassis
Turret	Welded ballistic aluminium
Crew	2
Main armament	Cockerill® 105 mm HP Gun (NATO Standard)
Secondary armament	7.62 mm co-ax, pintle mount (7.62, 12.7, 40 mm GL)
Ammunition loading	Auto-Loader (12-16 rounds)
Anti-tank capability	Turret launched AT systems
External cameras	360° cover
Elevation	-10 +42°
D/R/I	D 10,000/R6000/I3300
Ballistic protection	Up to Level 5 STANAG 4569
Protection	8 smoke grenade launchers APS, Anti-sniper detection, DAS, FFI, LWD
Sights	Identical Commander/Gunner Sights (Hunter/ Killer) Stabilised dual axis day/night

a  John
Cockerill company

info@johncockerillda.com